

SWX-29 LCD Digital Poster



www.swedx.co.uk




Android 11



Powerful CPU



500 Nits High Brightness



Full HD Display



Dual 5W Stereo Speakers




WiFi/Ethernet



USB, HDMI & TF Card Support



Bluetooth 4.0

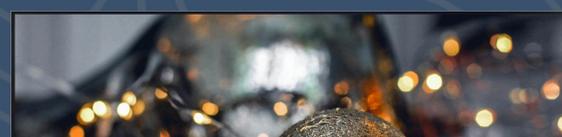

Features & Details

The SWX-29 is a 29-inch stretched bar Android display with Full HD resolution, a bright 500nit IPS panel, wide viewing angles, and a powerful Rockchip RK3568 processor for smooth performance. Ideal for shelf-edge displays, transportation signs, and compact digital signage, this slim unit offers versatile connectivity, rich media playback, and clear, vibrant visuals for targeted communication in busy spaces.



System	RAM	4GB
	Internal memory	32GB
Display	Operation system	Android 11.0
	Panel	LCD IPS panel
	Resolution	1920*540 Pixel
	Display mode	Normally black ,IPS
	Viewing angle	89/89/89/89(L/R/U/D)
	Contrast ratio	1200:1
	Luminance	500cd/m2
Network	Response time	8ms
	WiFi	802.11b/g/n
	Ethernet	10M/100M ethernet
Interface	Bluetooth	Bluetooth 4.0
	Card slot	TF card
	USB x 2	USB Host
	HDMI	HDMI out x1
	RJ45	RJ45
Media play	Serial port	USB for serial port
	Power jack	DC power input
	Earphone	3.5mm earphone
	Video format	MPEG1,MPEG2,MPEG4,H263,H264_VCI,RV_etc (Support (720P,1080i,1080P))
Others	Audio format	MP3/WMA/AAC etc.
	Photo	JPEG,JPG,BMP,PNG
	Speaker	2*5W
	Power consumption	60W
	Working temp	-10-50degree
	Working humidity	0-80%
Accessories	Certificates	PSE/FCC/CE etc.with extra cost
	Language	Multi-Language
	Adapter	Adapter,Input 110-220V,50-60Hz,Output 12V5A

Estimated Delivery Time - 25 Days

Model Numbers -

- SWX-K170-29

SWX-19 LCD Digital Poster



www.swedx.co.uk

SWEDXUK



Android 11



Wide 178° viewing angles



500 Nits High Brightness



Full HD Display



Dual 5W Stereo Speakers



WiFi/Ethernet



USB, HDMI & TF Card Support



Bluetooth 4.0



Features & Details

The SWX-19 is a 19-inch stretched bar Android display with Full HD resolution, a bright 500cd/m² IPS panel, wide viewing angles, and a powerful Rockchip RK3568 processor for smooth, reliable performance. Ideal for compact retail signage, transport information boards, and shelf-edge displays, this unit offers vibrant visuals, versatile connectivity, and rich media playback for targeted communication in high-traffic areas.



System	CPU	Rockchip RK3568
	RAM	4GB
	Internal memory	32GB
	Operation system	Android 11.0
Display	Panel	LCD IPS panel
	Resolution	1920*320 Pixel
	Display mode	Normally black ,IPS
	Viewing angle	89/89/89/89(L/R/U/D)
	Contrast ratio	1200:1
	Luminance	500cd/m ²
	Response time	8ms
Network	WiFi	802.11b/g/n
	Ethernet	10M/100M ethernet
	Buletooth	Bluetooth 4.0
	Card slot	TF card
Interface	USB x 2	USB Host
	HDMI	HDMI out x1
	RJ45	RJ45
	Serial port	USB for serial port
	Power jack	DC power input
	Earphone	3.5mm earphone
Media play	Video format	MPEG1,MPEG2,MPEG4,H263,H264, VC1,RV etc (Support (720P,1080i,1080P))
	Audio format	MP3/WMA/AAC etc.
	Photo	JPEG, JPG, BMP, PNG
Others	Speaker	2*5W
	Power consumption	60W
	Working temp	-10-50degree
	Working humidity	0-80%
	Certificates	PSE/FCC/CE etc.with extra cost
	Language	Multi-language
Accessories	Adapter	Adapter,Input 110-220V,50-60Hz,Output 12V5A

Estimated Delivery Time - 25 Days

Model Numbers -

- SWX-K180-19

SWX-37 LCD Digital Poster



www.swedx.co.uk


SWEDX UK



Android 11



Wide 178° viewing angles



500 Nits High Brightness



Full HD Display



Dual 5W Stereo Speakers



WiFi/Ethernet



USB, HDMI & TF Card Support



Bluetooth 4.0

Features & Details

The SWX-37 delivers crisp, ultra-wide visuals with its 37" IPS LCD panel, Android 11 system, and versatile connectivity, ideal for dynamic advertising and retail environments. Perfect for retail shelves, transportation hubs, or menu boards, the SWX-37 offers vibrant, stretched-format displays for impactful, space-efficient digital signage installations.



System	RAM	4GB
	Internal memory	32GB
	Operation system	Android 11.0
Display	Panel	LCD IPS panel
	Resolution	3840*430 Pixel
	Display mode	Normally black ,IPS
	Viewing angle	89/89/89/89(L/R/U/D)
	Contrast ratio	1200:1
	Luminance	500cd/m2
	Response time	8ms
Network	WiFi	802.11b/g/n
	Ethernet	10M/100M ethernet
	Bluetooth	Bluetooth 4.0
Interface	Card slot	TF card
	USB x 2	USB Host
	HDMI	HDMI out x1
	RJ45	RJ45
	Serial port	USB for serial port
	Power jack	DC power input
	Earphone	3.5mm earphone
Media play	Video format	MPEG1,MPEG2,MPEG4,H263,H264, VC1,RV, etc (Support (720P,1080i,1080P))
	Audio format	MP3/WMA/AAC etc.
	Photo	JPEG,JPG,BMP,PNG
	Speaker	2*5W
Others	Power consumption	96W
	Working temp	-10-50degree
	Working humidity	0-80%
	Certificates	PSE/FCC/CE etc.with extra cost
Accessories	Language	Multi-language
	Adapter	Adapter,Input 110-220V,50-60Hz,Output 12V

Estimated Delivery Time - 25 Days

Model Numbers -

- SWX-K190-37

SWX-49 LCD Digital Poster



www.swedx.co.uk



Android 11



Wide 178° viewing angles



500 Nits High Brightness



Slim, Panoramic Display Design



Dual 5W Stereo Speakers



WiFi/Ethernet



USB, HDMI & TF Card Support



Bluetooth 4.0



Features & Details

The SWX-49 is a premium 49.5" stretched bar display designed for impactful digital advertising. Powered by Android 11.0 with a Rockchip RK3568 CPU, it offers smooth performance, vibrant visuals, and a panoramic form factor ideal for unique placements. Perfect for transportation hubs, retail shelves, menu boards, and corporate environments where a sleek, wide-format display can maximize engagement and deliver dynamic multimedia content effectively.



System	CPU	Rockchip RK3568
	RAM	4GB
	Internal memory	32GB
	Operation system	Android 11.0
Display	Panel	LCD IPS panel
	Resolution	1920*540 Pixel
	Display mode	Normally black ,IPS
	Viewing angle	89/89/89/89(L/R/U/D)
	Contrast ratio	1200:1
	Luminance	500cd/m2
	Response time	8ms
Network	WiFi	802.11b/g/n
	Ethernet	10M/100M ethernet
	Buletooth	Bluetooth 4.0
Interface	Card slot	TF card
	USB x 2	USB Host
	HDMI	HDMI out x1
	RJ45	RJ45
	Serial port	USB for serial port
	Power jack	DC power input
	Earphone	3.5mm earphone
Media play	Video format	MPEG1,MPEG2,MPEG4,H263,H264, VC1,RV etc (Support (720P,1080i,1080P))
	Audio format	MP3/WMA/AAC etc.
	Photo	JPEG,JPG,BMP,PNG
Others	Speaker	2*5W
	Power consumption	60W
	Working temp	-10-50degree
	Working humidity	0-80%
	Certificates	PSE/FCC/CE etc.with extra cost
Accessories	Language	Multi-language
	Adapter	Adapter,Input 110-220V,50-60Hz,Output 12V/5A

Estimated Delivery Time - 25 Days

Model Numbers -

- SWX-K200-49

SWX-48 LCD Digital Poster



www.swedx.co.uk



Android 11



Wide 178° viewing angles



500 Nits High Brightness



Full HD Display



Dual 5W Stereo Speakers



WiFi/Ethernet



USB, HDMI & TF Card Support



Bluetooth 4.0



Features & Details

The SWX-48 is a 48-inch stretched bar Android display offering crisp 1920x360 resolution, a bright IPS panel, and versatile connectivity for professional signage needs in space-conscious environments. Ideal for shelf-edge displays, transportation signage, and menu boards, the SWX-48 combines slim, panoramic design with vibrant visuals and smooth Android-powered performance for engaging audience communication.



System	CPU	Rockchip RK3568
	RAM	4GB
	Internal memory	32GB
	Operation system	Android 11.0
Display	Panel	LCD IPS panel
	Resolution	1920*360 Pixel
	Display mode	Normally black IPS
	Viewing angle	89/89/89/89(L/R/U/D)
	Contrast ratio	1200:1
	Luminance	500cd/m2
Network	Response time	8ms
	WiFi	802.11b/g/n
	Ethernet	10M/100M ethernet
	Buletooth	Bluetooth 4.0
Interface	Card slot	TF card
	USB x 2	USB Host
	HDMI	HDMI out x1
	RJ45	RJ45
	Serial port	USB for serial port
	Power jack	DC power input
Media play	Earphone	3.5mm earphone
	Video format	MPEG1,MPEG2,MPEG4,H263,H264, VC1,RV etc (Support 720P,1080i,1080P)
	Audio format	MP3/WMA/AAC etc.
Others	Photo	JPEG,JPG,BMP,PNG
	Speaker	2*5W
	Power consumption	96W
	Working temp	-10-50degree
	Working humidity	0-80%
	Certificates	PSE/FCC/CE etc.with extra cost
Accessories	Language	Multi-language
	Adapter	Adapter,input 110-220V,50-60Hz,Output 12V

Estimated Delivery Time - 25 Days

Model Numbers -

- SWX-K210-48

SWX-24 LCD Digital Poster



www.swedx.co.uk



Android 11



Wide 178° viewing angles



500 Nits High Brightness



Full HD Display



Dual 5W Stereo Speakers



WiFi/Ethernet



USB, HDMI & TF Card Support



Bluetooth 4.0



Features & Details

The SWX-24 is a 24-inch stretched bar Android display with 1920×360 resolution, offering bright and vivid visuals through a high-quality IPS panel and smooth performance from the Rockchip RK3568 processor. Ideal for compact shelf-edge advertising, menu boards, and transportation signage, the SWX-24 provides a slim, panoramic format for impactful content delivery in space-limited environments.




System	CPU	Rockchip RK3568
	RAM	4GB
	Internal memory	32GB
	Operation system	Android 11.0
Display	Panel	LCD IPS panel
	Resolution	1920*360 Pixel
	Display mode	Normally black ,IPS
	Viewing angle	89/89/89/89(L/R/U/D)
	Contrast ratio	1200:1
	Luminance	500cd/m2
	Response time	8ms
Network	WiFi	802.11b/g/n
	Ethernet	10M/100M ethernet
	Bluetooth	Bluetooth 4.0
Interface	Card slot	TF card
	USB x 2	USB Host
	HDMI IN	HDMI out x1
	RJ45	RJ45
	Serial port	USB for serial port
	Power jack	DC power input
	Earphone	3.5mm earphone
Media play	Video format	MPEG1,MPEG2,MPEG4,H263,H264, VC1,RV etc (Support (720P,1080I,1080P))
	Audio format	MP3/WMA/AAC etc.
	Photo	JPEG,JPG,BMP,PNG
Others	Speaker	2*5W
	Power consumption	60W
	Working temp	-10-50degree
	Working humidity	0-80%
	Certificates	PSE/FCC/CE etc.with extra cost
Accessories	Language	Multi-language
	Adapter	Adapter,Input 110-220V,50-60Hz,Output 12V5A

Estimated Delivery Time - 25 Days

Model Numbers -

- SWX-K220-24

SWX-12 LCD Digital Poster

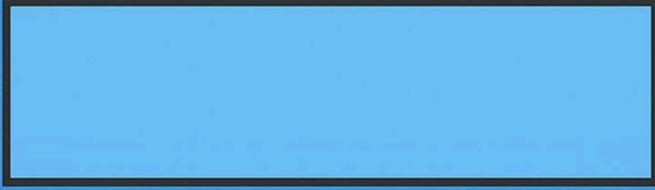

www.swedx.co.uk



Android 11



Wide 178° viewing angles



500 Nits High Brightness




Full HD Display



Dual 5W Stereo Speakers



WiFi/Ethernet




USB, HDMI & TF Card Support



Bluetooth 4.0

Features & Details

The SWX-12 is a compact 12.6-inch stretched bar Android display with 1920x515 resolution, delivering vivid colour and sharp detail through a high-brightness IPS panel and smooth Rockchip RK3568 processing. Ideal for shelf-edge promotions, directional signage, and tight-space installations, the SWX-12 offers impactful visuals, versatile connectivity, and Android-powered flexibility in a small, panoramic format.



System	CPU	Rockchip RK3568
	RAM	4GB
	Internal memory	32GB
	Operation system	Android 11.0
Display	Panel	LCD IPS panel
	Resolution	1920*515 Pixel
	Display mode	Normally black_IPS
	Viewing angle	89/89/89/89(L/R/U/D)
	Contrast ratio	1200:1
	Luminance	500cd/m2
	Response time	8ms
Network	WiFi	802.11b/g/n
	Ethernet	10M/100M ethernet
	Buletooth	Bluetooth 4.0
	Card slot	TF card
Interface	USB x 2	USB Host
	HDMI	HDMI out x1
	RJ45	RJ45
	Serial port	USB for serial port
	Power jack	DC power input
	Earphone	3.5mm earphone
Media play	Video format	MPEG1,MPEG2,MPEG4,H263,H264, VC1,RV etc (Support 720P,1080i,1080P))
	Audio format	MP3/WMA/AAC etc.
	Photo	JPEG, JPG, BMP, PNG
Others	Speaker	2*5W
	Power consumption	60W
	Working temp	-10-50degree
	Working humidity	0-80%
	Certificates	PSE/FCC/CE etc.with extra cost
Accessories	Language	Multi-language
	Adapter	Adapter,Input 110-220V,50-60Hz,Output 12V5A

Estimated Delivery Time - 25 Days

Model Numbers -

- SWX-K230-12

SWX-35 LCD Digital Poster



www.swedx.co.uk



Android 11



Wide 178° viewing angles



500 Nits High Brightness



Full HD Display



Dual 5W Stereo Speakers



WiFi/Ethernet



USB, HDMI & TF Card Support



Bluetooth 4.0



Features & Details

The SWX-35 is a 35-inch stretched bar Android display with an ultra-wide 3840×200 resolution, delivering sharp panoramic visuals and smooth operation powered by Android 11.0 and the Rockchip RK3568 processor. Perfect for shelf-edge advertising, digital ticker displays, and transport information, the SWX-35's ultra-wide format and slim design allow for impactful, space-efficient content delivery in a variety of environments.



System	CPU	Rockchip RK3568
	RAM	2GB
	Internal memory	16GB
	Operation system	Android 11.0
Display	Panel	LCD IPS panel
	Resolution	3840*200 Pixel
	Display mode	Normally black ,IPS
	Viewing angle	89/89/89/89(L/R/U/D)
	Contrast ratio	1200:1
	Luminance	500cd/m2
	Response time	8ms
Network	WiFi	802.11b/g/n
	Ethernet	10M/100M ethernet
	Buletooth	Bluetooth 4.0
Interface	Card slot	TF card
	USB x 2	USB Host
	HDMI	NO
	RJ45	NO
	Serial port	USB for serial port
	Power jack	DC power input
	Earphone	3.5mm earphone
Media play	Video format	MPEG1,MPEG2,MPEG4,H264,H264_V,VC1,RV etc (Support (720P,1080I,1080P))
	Audio format	MP3/WMA/AAC etc.
	Photo	JPEG,JPG,BMP,PNG
Others	Speaker	2*5W
	Power consumption	60W
	Working temp	-10-50degree
	Working humidity	0-80%
	Certificates	PSE/FCC/CE etc.with extra cost
Accessories	Language	Multi-language
	Adapter	Adapter,Input 110-220V,50-60Hz,Output 12V5A

Estimated Delivery Time - 25 Days

Model Numbers -

- SWX-K240-35

SWX-23 LCD Digital Poster



www.swedx.co.uk



Android 9



Wide 178° viewing angles



500 Nits High Brightness



Full HD Display



Dual 2W Stereo Speakers



WiFi/Ethernet



USB, HDMI & TF Card Support



Bluetooth 4.0



Features & Details

The SWX-23 is a 23.1-inch stretched bar Android display with a slim panoramic design and 1920x158 resolution, providing sharp and bright visuals powered by Android 9.0 and an RK-PX30 processor. Perfect for shelf-edge promotions, transport timetables, and information strips, the SWX-23 offers a compact yet eye-catching signage solution with versatile connectivity and low power consumption





System	CPU	RK-PX30	
	RAM	2GB	
	Internal memory	16GB	
Display	Operation system	Android 9.0	
	Panel	LCD IPS panel	
	Resolution	1920*158 Pixel	
	Display mode	Normally black ,IPS	
	Viewing angle	89/89/89/89(L/R/U/D)	
	Contrast ratio	1200:1	
	Luminance	500cd/m2	
	Response time	8ms	
	Network	WiFi	802.11b/g/n
		Ethernet	10M/100M ethernet
Buletooth		Bluetooth 4.0	
Interface	Card slot	TF card	
	USB x 2	USB Host	
	HDMI IN	No	
	RJ45	No	
	Serial port	USB for serial port	
	Power jack	DC power input	
Media play	Earphone	No	
	Video format	MPEG1,MPEG2,MPEG4,H263,H264, VC1,RV etc (Support (720P,1080i,1080P))	
	Audio format	MP3/WMA/AAC etc.	
	Photo	JPEG,JPG,BMP,PNG	
Others	Speaker	2*2W	
	Power consumption	60W	
	Working temp	-10-50degree	
	Working humidity	0-80%	
	Certificates	PSE/FCC/CE etc.with extra cost	
Accessories	Language	Multi-language	
	Adapter	Adapter,Input 110-220V,50-60Hz,Output 12V5A	

Estimated Delivery Time - 25 Days

Model Numbers -

- SWX-K250-23

SWX-28 LCD Digital Poster

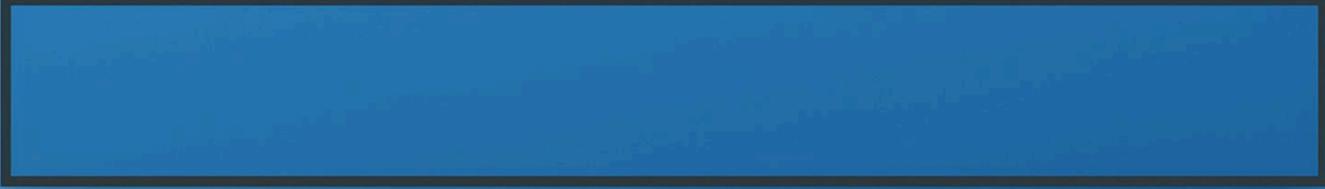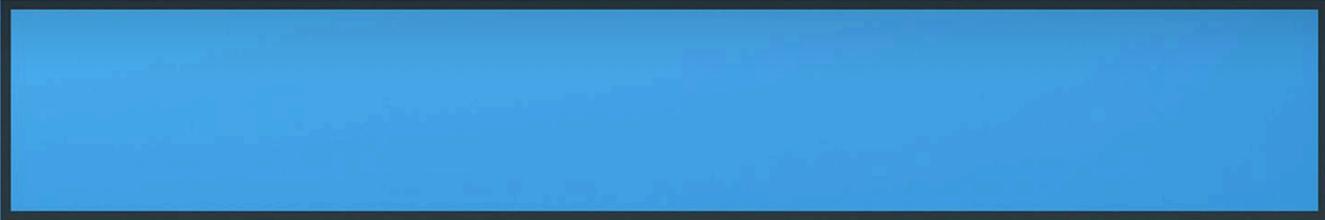

www.swedx.co.uk



Android 11



Wide 178° viewing angles



500 Nits High Brightness



Full HD Display



Dual 5W Stereo Speakers




WiFi/Ethernet



USB, HDMI & TF Card Support




Bluetooth 4.0



Features & Details

The SWX-28 is a 28-inch stretched bar Android display offering sharp 1920x360 resolution, a bright IPS panel, and smooth Rockchip RK3568 performance, perfect for delivering engaging visuals in space-limited installations. Ideal for shelf-edge advertising, transport signage, and menu boards, the SWX-28 provides panoramic clarity, versatile connectivity, and reliable performance for modern digital signage applications.

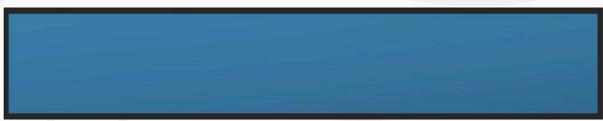

System	CPU	Rockchip RK3568
	RAM	4GB
	Internal memory	32GB
	Operation system	Android 11.0
Display	Panel	LCD IPS panel
	Resolution	1920*360 Pixel
	Display mode	Normally black IPS
	Viewing angle	89/89/89/89(L/R/U/D)
	Contrast ratio	1200:1
	Luminance	500cd/m2
	Response time	8ms
Network	WiFi	802.11b/g/n
	Ethernet	10M/100M ethernet
	Bluetooth	Bluetooth 4.0
	Card slot	TF card
Interface	USB x 2	USB Host
	HDMI IN	HDMI out x1
	RJ45	RJ45
	Serial port	USB for serial port
	Power jack	DC power input
	Earphone	3.5mm earphone
	Media play	Video format
Audio format		MP3/WMA/AAC etc.
Photo		JPEG,JPG,BMP,PNG
Speaker		2*5W
Others	Power consumption	60W
	Working temp	-10-50degree
	Working humidity	0-80%
	Certificates	PSE/FCC/CE etc.with extra cost
	Language	Multi-language
	Accessories	Adapter.Input 110-220V,50-60Hz,Output 12V5A

Estimated Delivery Time - 25 Days

Model Numbers -

- SWX-K260-28

SWX-36 LCD Digital Poster




www.swedx.co.uk




Android 11



Wide 178° viewing angles



500 Nits High Brightness



Full HD Display



Dual 5W Stereo Speakers



WiFi/Ethernet



USB, HDMI & TF Card Support



Bluetooth 4.0



Features & Details

The SWX-36 is a 36-inch stretched bar Android display offering a crisp 1920x532 resolution, a bright IPS panel, and powerful Rockchip RK3568 performance for smooth, vibrant digital content playback. Perfect for shelf-edge displays, transport information boards, and advertising banners, the SWX-36 provides panoramic visuals, flexible connectivity, and reliable operation for modern signage applications.



System	CPU	Rockchip RK3568
	RAM	4GB
	Internal memory	32GB
	Operation system	Android 11.0
Display	Panel	LCD IPS panel
	Resolution	1920*532 Pixel
	Display mode	Normally black_IPS
	Viewing angle	89/89/89/89(L/R/U/D)
	Contrast ratio	1200:1
	Luminance	500cd/m2
	Response time	8ms
Network	WiFi	802.11b/g/n
	Ethernet	10M/100M ethernet
	Buletooth	Bluetooth 4.0
	Card slot	TF card
Interface	USB x 2	USB Host
	HDMI	HDMI out x1
	RJ45	RJ45
	Serial port	USB for serial port
	Power jack	DC power input
	Earphone	3.5mm earphone
	Media play	Video format
Audio format		MP3/WMA/AAC etc.
Photo		JPEG,JPG,BMP,PNG
Speaker		2*5W
Others	Power consumption	60W
	Working temp	-10-50degree
	Working humidity	0-80%
	Certificates	PSE/FCC/CE etc.with extra cost
	Language	Multi-language
	Accessories	Adapter

Estimated Delivery Time - 25 Days

Model Numbers -

- SWX-K270-36