



# RCM - LED Display Outdoor Series

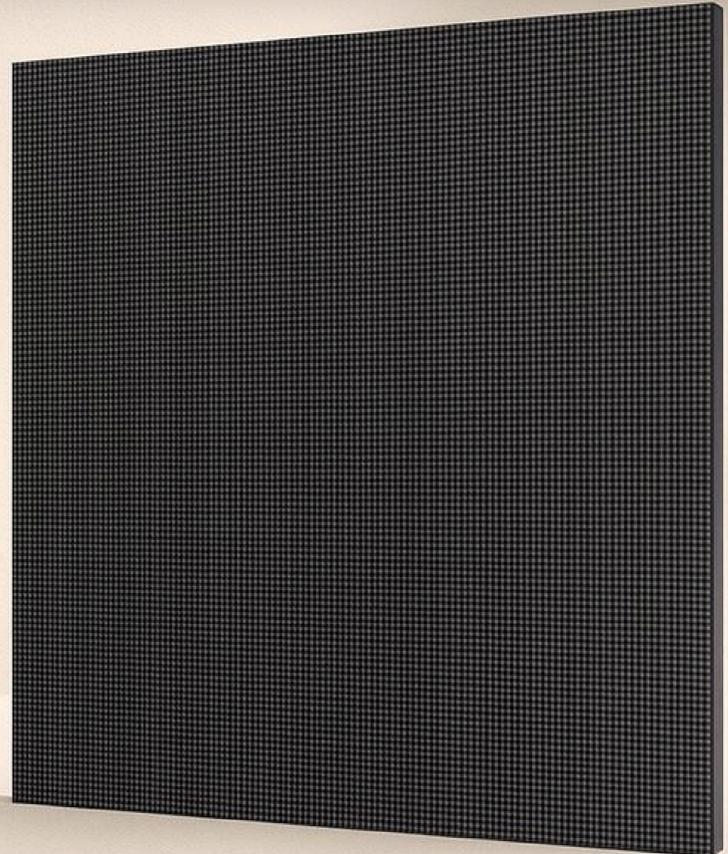

[www.swedx.co.uk](http://www.swedx.co.uk)

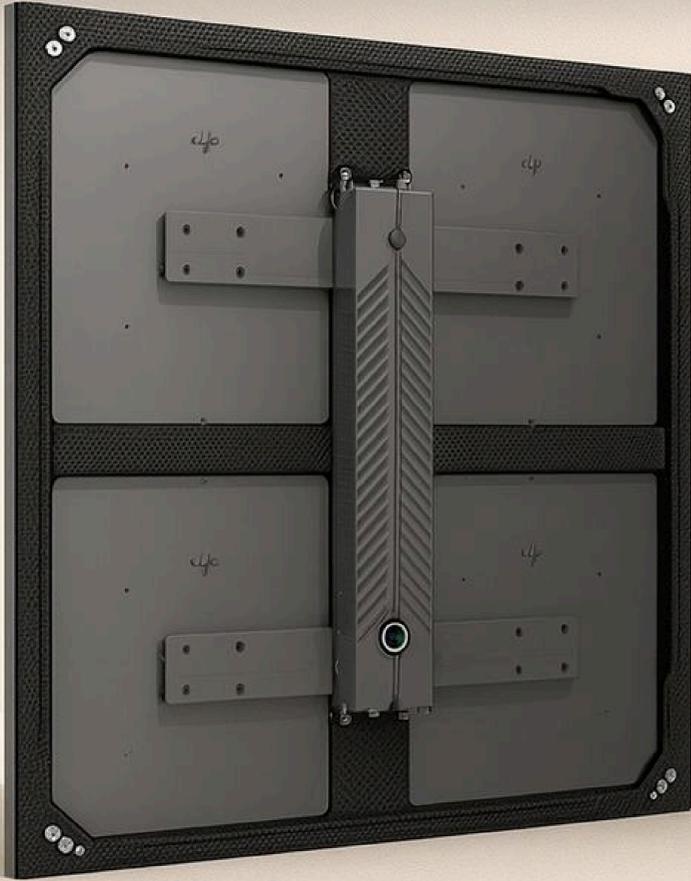

IP65  
Certified



HDR  
Engine 2.0



4500 Nits  
High Brightness



Fast lock  
System



Mesh &  
Windproof




Ultra  
Lightweight 6.5kg



Fully  
Modular



Embedded  
Positioning Pin

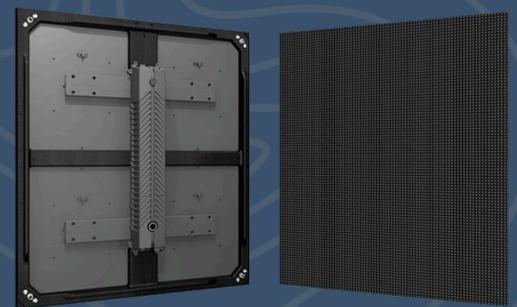

## Features & Details

The RCM combines a carbon fibre frame with modular design, HDR 2.0 engine, and embedded positioning pins. It offers 4500–5000nits brightness, ultra-high refresh, and is optimized for fast staging. Ideal for staging, outdoor events, and rapid installs, Panther II handles curved setups and extreme environments with ease. Its sleek build and HDR-ready engine deliver immersive visual impact.



Title	RCM2	RCM3
Pixel Pitch	2.5 mm	3.125mm
LED Configuration	SMD1415 LED	SMD1415 LED
Panel Dimension:	600mm x675mm x 82 mm	600mm x675mm x 82 mm
Panel Resolution	240 x 270 (H x V)	192 x 216 (H x V)
Weight Per Panel	6.5 kg   14.33 lb	6.5 kg   14.33 lb
Power Max/Average	700W/350W	700W/350W
BTU Max/Average	2390/1100	2390/1100
Serviceability	Rear	Rear
Curving	Concave 15° ~ Convex 10°	Concave 15° ~ Convex 10°
Brightness	4500nits	5000nits
Gray Scale	16 bit	16 bit
Refresh Rate	3840 Hz	3840 Hz
Scan Ratio	1/27	1/18
Viewing Angle	140°/ 140° (H/V)	140°/ 140° (H/V)
IP Rating	IP65	IP65
Operating Environment	Out door	Out door

Estimated Delivery Time - 25 Days

### Model Numbers -

- SWX-DZ110-2
- SWX-DZ110-3