


NDU-B Series - LED Display Outdoor



www.swedx.co.uk

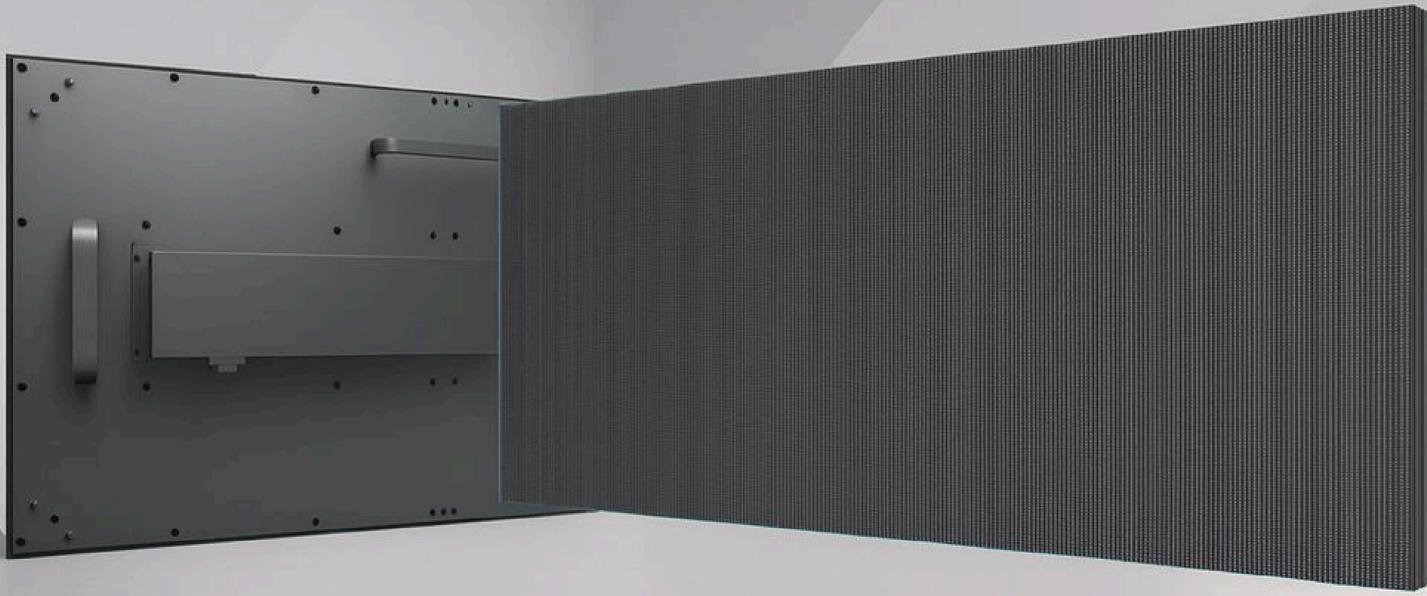

IP66
Certified



2-In-1 Power
& Signal Cable



5000 Nits
High Brightness



Easily
Serviceable



5kg
Per Panel




Anti
Glare



Magnetic
Safety Lock



High
Refresh rate

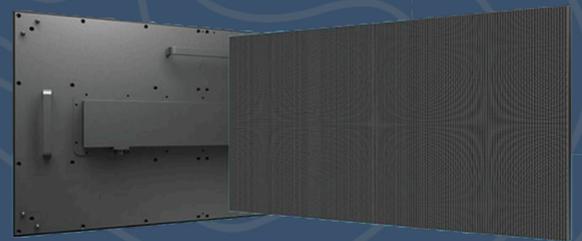

Features & Details

The NDU-B Series features a slim, lightweight aluminium design, IP65 protection, 16:9 aspect ratio, magnetic locking, 5000-nit brightness, and 3840Hz refresh for reliable outdoor signage performance. Ideal for digital signage and small-format outdoor displays, it installs easily without air conditioning. Perfect for direct sunlight, humid environments, and spaces needing clean cable integration and front maintenance.



Title	NDU-B2	NDU-B3
Pixel Pitch	2.5 mm	3.125mm
LED Configuration	SMD1415 LED	SMD1415 LED
Panel Dimension:	600mm x337.5mm x 82 mm	600mm x337.5mm x 82 mm
Panel Resolution	240 x 135 (H x V)	192 x 108 (H x V)
Weight Per Panel	5 kg 11.05 lb	5 kg 11.05 lb
Power Max/Average	700W/350W	700W/350W
BTU Max/Average	2390/1100	2390/1100
Serviceability	Rear	Rear
Brightness	4500nits	5000nits
Gray Scale	16 bit	16 bit
Refresh Rate	3840 Hz	3840 Hz
Scan Ratio	1/27	1/18
Viewing Angle	140°/ 140° (H/V)	140°/ 140° (H/V)
IP Rating	IP65	Ip65
Operating Environment	Out door	Out door

Estimated Delivery Time - 25 Days

Model Numbers -

- SWX-DZ180-B2
- SWX-DZ180-B3