

UTF Series - LED Display Outdoor

www.swedx.co.uk

SWEDX UK



IP65
Certified



HDR
Display



4500 Nits
High Brightness



Easily
Serviceable



Advanced
Protection




2.5kg
Per Panel



54mm
Thick




Wide
Viewing Angles

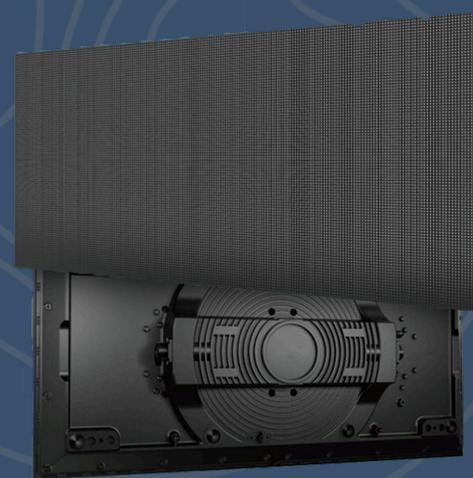

Features & Details

The UTF Series is a thin, light, and adaptable LED panel system ideal for creative shapes and tough installations. With high brightness, weather protection, and slim design, it meets modern outdoor needs. These panels are perfect for rental, staging, and permanent installs where quick access, durability, and reliable visuals are crucial. Ideal for events, architecture, and digital signage.

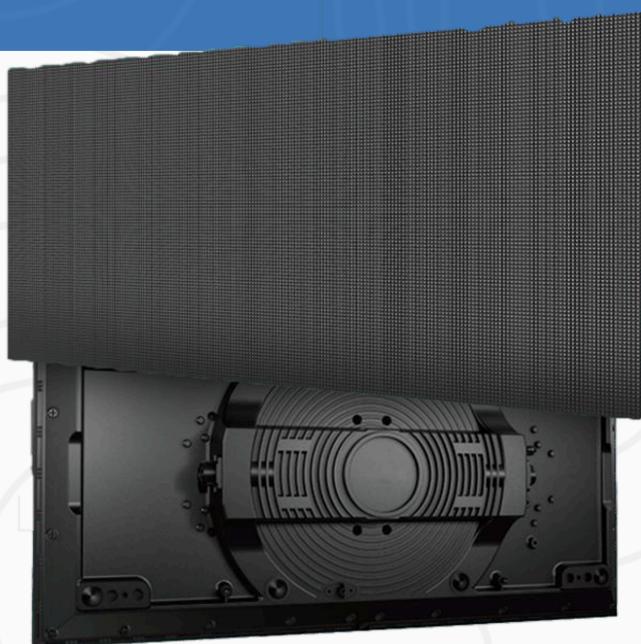

Title	UTF2	UTF3
Pixel Pitch	2.6 mm	3.91 mm
LED Configuration	SMD1415 LED	SMD1921 LED
Panel Dimension:	250mm x500mm x 54 mm	250mm x500mm x 54 mm
Panel Resolution	96 x 192 (H x V)	64 x 128 (H x V)
Weight Per Panel	2.5 kg 5.51 lb	2.5 kg 5.51 lb
Power Max/Average	680W/300W	680W/300W
BTU Max/Average	2310/1000	2310/1000
Serviceability	Front / Rear	Front / Rear
Brightness	4500nits	5000nits
Gray Scale	16 bit	16 bit
Refresh Rate	3840 Hz	3840 Hz
Scan Ratio	1/24	1/16
Viewing Angle	140° / 140° (H/V)	140° / 140° (H/V)
IP Rating	IP65	IP65
Operating Environment	Out door	Out door

Estimated Delivery Time - 25 Days

Model Numbers -

- SWX-DZ140-2
- SWX-DZ140-3