

COB Mini & Micro LED



www.swedx.co.uk

SWEDX UK



Energy Saving



Low Power Consumption



2000nits Brightness



High Contrast Ratio



Flip-COB LED




Easy Install



IP54 Rated



High Refresh Rate

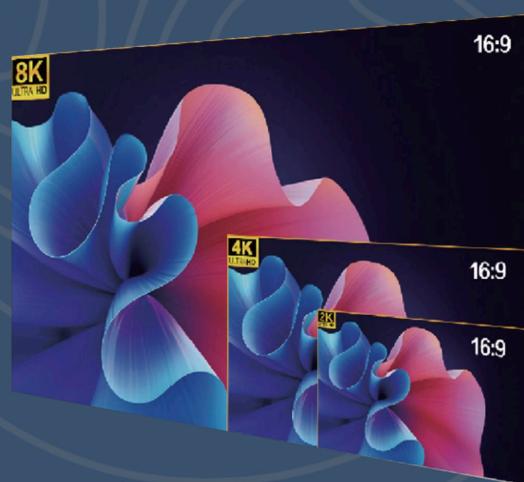

Features & Details

The COB Mini & Micro LED series features Flip-Chip COB technology, 2000nits brightness, and seamless front access, making it ideal for high-precision indoor environments like control rooms or retail displays.



Pixel Pitch	0.78mm	0.9375mm	1.25mm	1.56mm
LED Type	Flip-COB(common cathode)			
Cabinet Dimension(mm)	600*337.5*29.5			
Cabinet Resolution	768*432	640*360	480*270	384*216
Module Size(mm)	150x168.75			
Cabinet Weight	4kg			
Cabinet Material	Die-casting Aluminum			
Driving Type	1/36	1/36 or 1/54	1/27 or 1/60	1/48
Maintenance	Front Service			
Brightness	600/2000 nits	600/2000 nits	600/1500 nits	600/1000 nits
Max Power	390W/m ²	420W/m ²	330W/m ²	330W/m ²
Avg Power	136W/m ²	147W/m ²	100W/m ²	100W/m ²
IP Rating	Front: IP54 Rear: IP30			
Refresh Rate	>3840Hz or >7680Hz			
Installation Type	Mounting / Hanging / Stacking			
Gray Scale	16bit			
Viewing Angle	H:170°V:170°			
Operational Temp	-20 C ~+50 C			

Estimated Delivery Time - 25 Days

Model Numbers -

- SWX-DZ2707
- SWX-DZ2709
- SWX-DZ27012
- SWX-DZ27015