Silver Panel Series

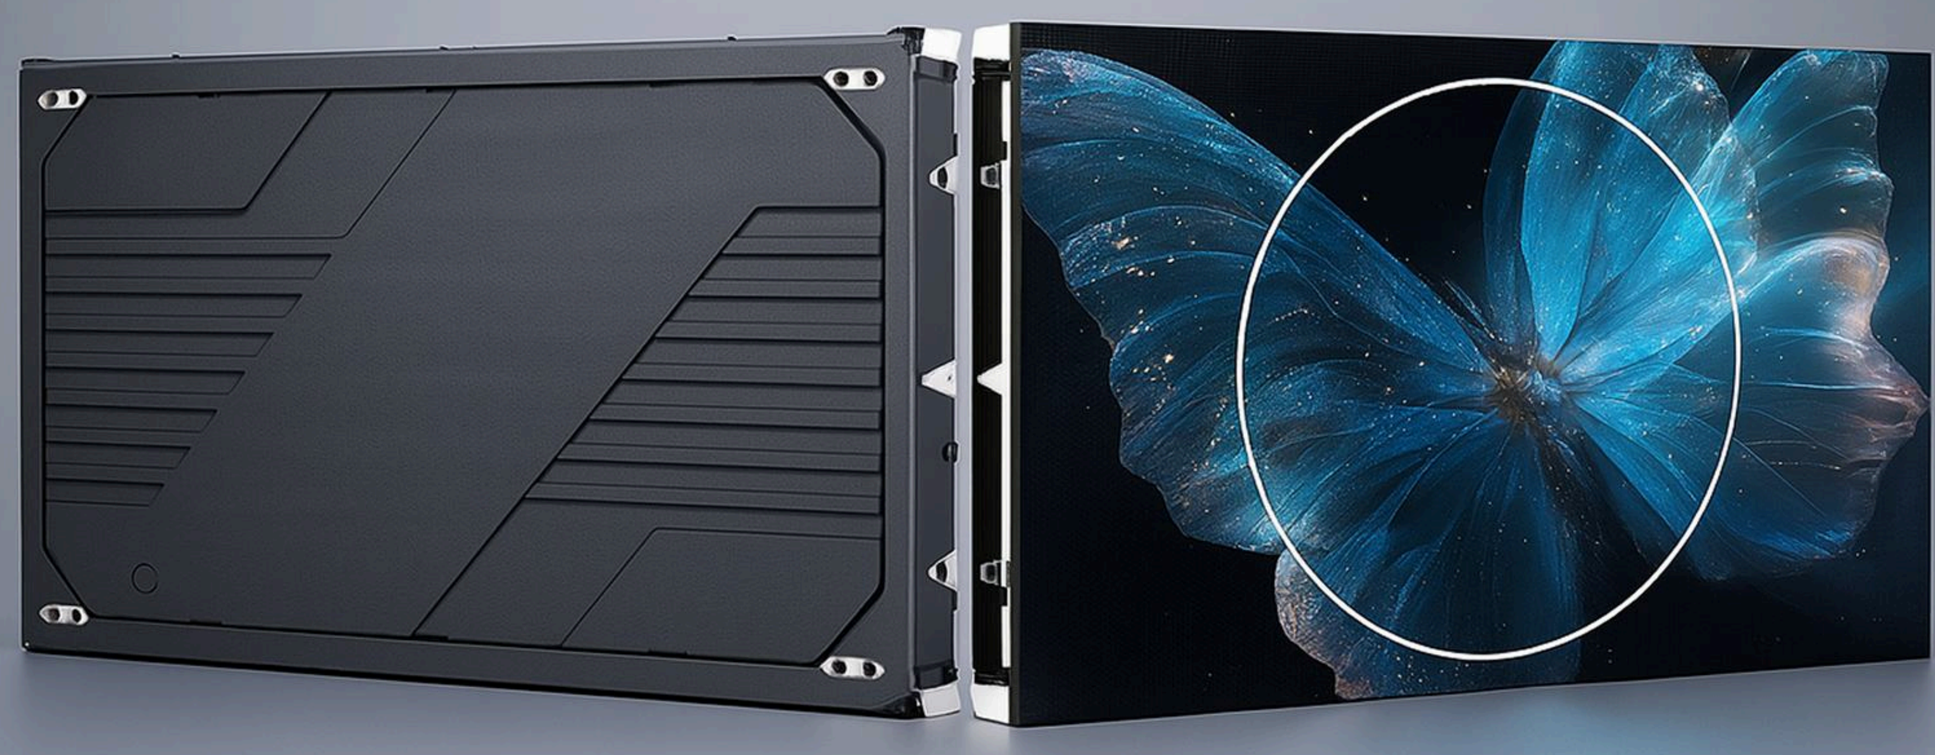

www.swedx.co.uk

SWEDX UK

- Cold Screen
- PWM+PAM Drive
- 1000 Nits High Brightness
- High Contrast Ratio
- Stunning greyscale
- High Refresh Rate
- Low Power Consumption
- Integrated Row & Column Driver

Features & Details

This high-performance LED display module features a highly integrated driver with pixel pitches of P0.78, P0.93, and P1.25, delivering a sharp 1000nit brightness and ultra-smooth 7680Hz refresh rate. Ideal for professional applications, it ensures vivid imagery with exceptional clarity and precision. Designed with power efficiency in mind, it uses a common cathode and PWM+PAM drive technology to reduce power consumption while enhancing grayscale at low brightness. This results in cooler operation, high contrast ratios, and stunning visual performance in any setting.

SLIVER PANEL SERIES: SPECIFICATIONS			
Pixel Pitch	0.78	0.93	1.25
Module Size (mm)	150*168.75 mm		
Module Resolution	192 * 216	160 * 180	120 * 135
Surface	Matte Surface		
Cabinet Size (mm)	600 * 337.5 * 39.75		
Cabinet Weight (kg)	4		
Resolution	768 * 432	640 * 360	480 * 270
Flash Memory	Supported		
Brightness (nit)	1000 (after calibration)		
Refresh Rate (Hz)	7680		
Contrast Ratio	15,000 : 1		
Colour Temperature (K)	9300 (standard)		
View. Angle (°)	160		
Input Voltage	AC 100~240V, 50/60Hz		
Peak Power (W/m²)	470	450	425
LED control	PWM+PAM		

Estimated Delivery Time - **25 Days**

Model Numbers -

- SWX-C1207
- SWX-C1209
- SWX-C12012