


Platinum Panel Series



www.swedx.co.uk

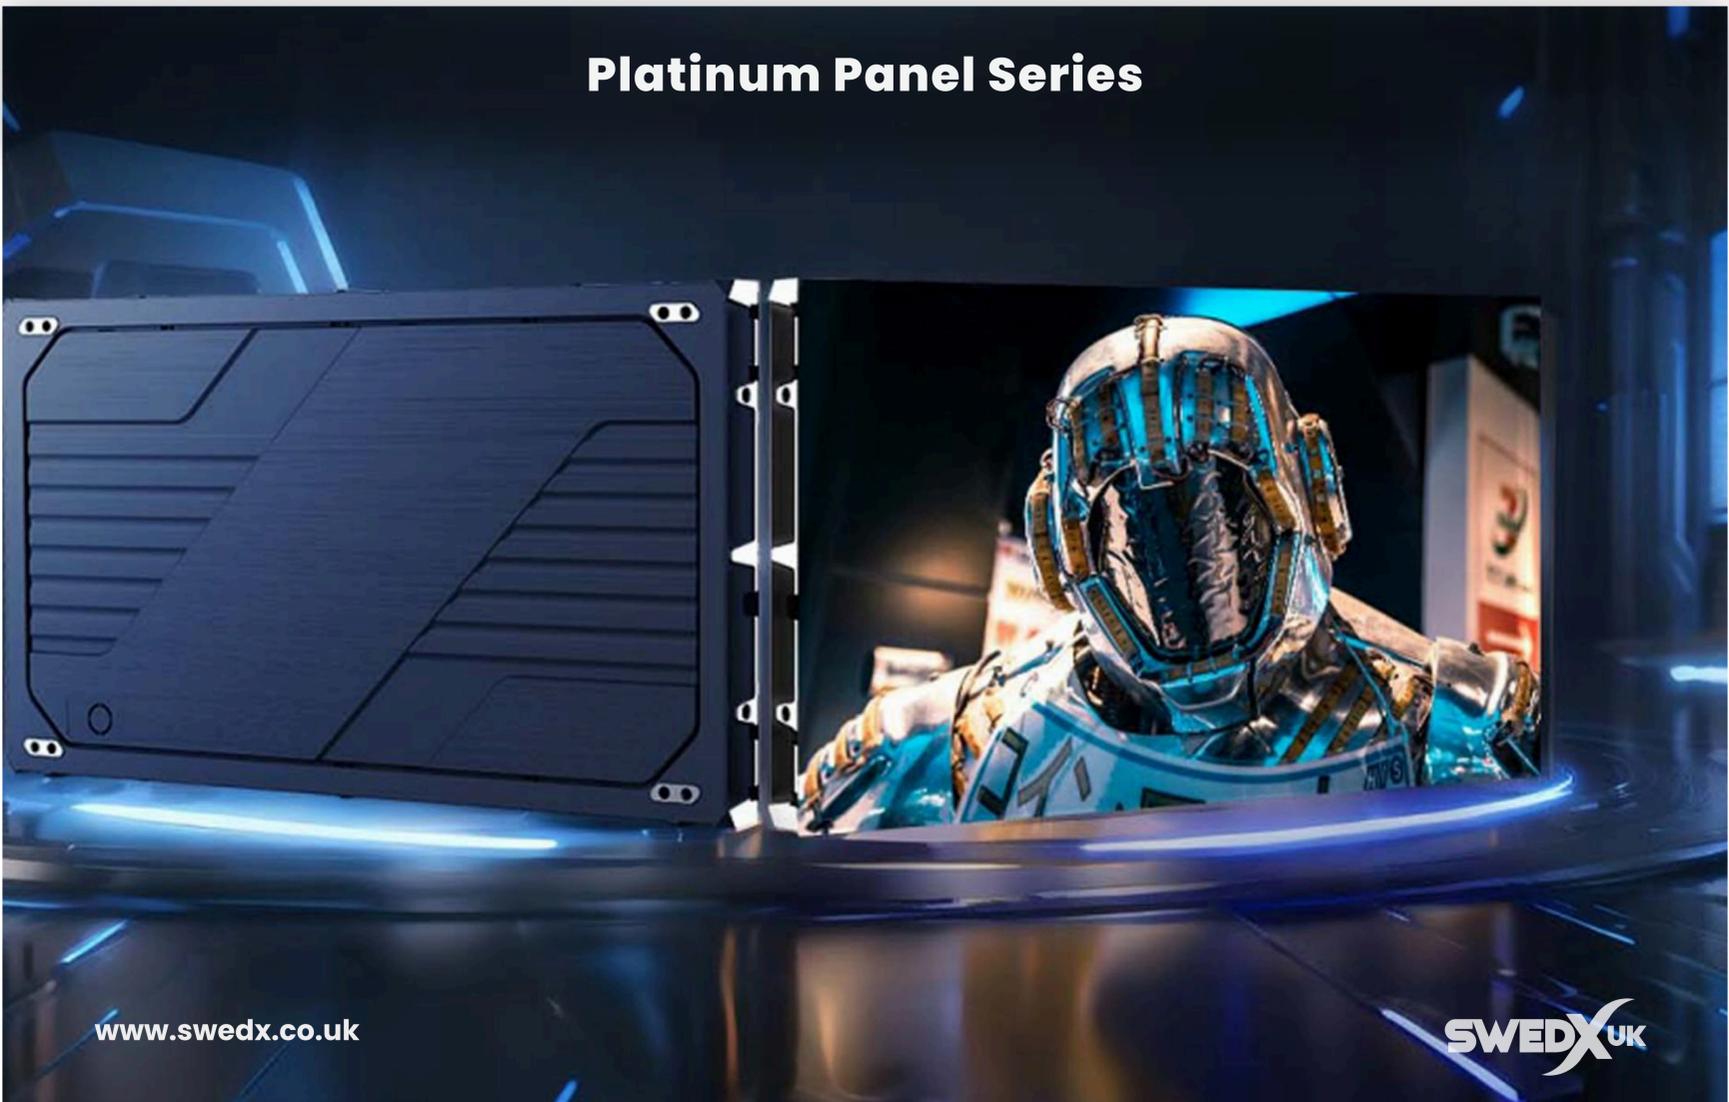

AI Pixel Enhancement



Cold Screen with Lower Power consumption



600 Nits High Brightness



High Resolution



Fast Heat Dissipation



High Response Time



Cost Effective



30,000:1 Contrast ratio



Features & Details

This advanced LED display range, available in pixel pitches from P0.62 to P1.87, features a remarkable 30000:1 contrast ratio, fast heat dissipation, and low-temperature rise—ensuring cooler, longer-lasting performance. Energy-efficient with shared RGB chips, it reduces heat and power use while maintaining sharp, high-contrast visuals. Optimized for professional use, it includes Pixel AI enhancement for detailed, vivid imagery and supports cost-efficient design through a common cathode system in select models. Ideal for premium installations, it balances performance, reliability, and efficiency.



PLATINUM PANEL SERIES: SPECIFICATIONS					
Pixel Pitch	0.62	0.78	0.93	1.25	1.56
Module Size (mm)	150 * 168.75				
Module Resolution	120 * 135	96 * 108	80 * 180	60 * 135	48 * 108
Surface	Matte Surface				
Cabinet Size (mm)	600 * 337.5 * 39.75 / 600 * 675 * 39.75				
Cabinet Weight (kg)	4 / 7.9				
Cabinet Resolution	480 * 270 / 480 * 540	384 * 216 / 384 * 432	320 * 360 / 320 * 720	240 * 270 / 240 * 540	192 * 216 / 192 * 432
Flash Memory	Supported				
Brightness (nit)	600 (after calibration)				
Refresh Rate (Hz)	3840				
Contrast Ratio	20,000 : 1				
Colour Temperature (K)	9300 (standard)				
View Angle (°)	160				
Input Voltage	AC 100-240 V, 50/60 Hz				
Peak Power (W/m ²)	371	346	322	297	198
Pixel Type	Shared RGB				

Estimated Delivery Time - 25 Days

Model Numbers -

- SWX-C1006
- SWX-C1007
- SWX-C1009
- SWX-C10012
- SWX-C10015