SWX-Q Series Display

www.swedx.co.uk

SWEDX UK

- UHD Display
- 24/7 Operational Reliability
- 1500 Nits High Brightness
- HDMI & USB Support
- Intelligent temperature Control
- 192 Mini LED Dimming Zones
- Rotation Support
- 1,000,000:1 Contrast Ratio

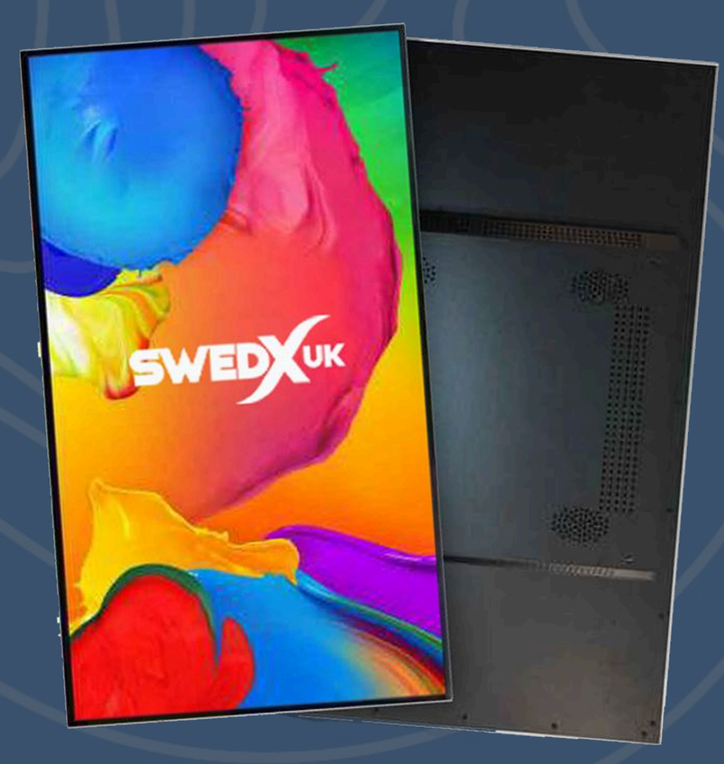

Features & Details

The Q-Series high-contrast commercial display delivers 1500 nits brightness, 192 mini LED dimming zones, and 1,000,000:1 contrast for exceptional visual performance. Built for demanding environments, it features intelligent temperature control, auto-brightness adjustment, split-screen modes, and a high-resolution IPS panel for clear, vibrant images.

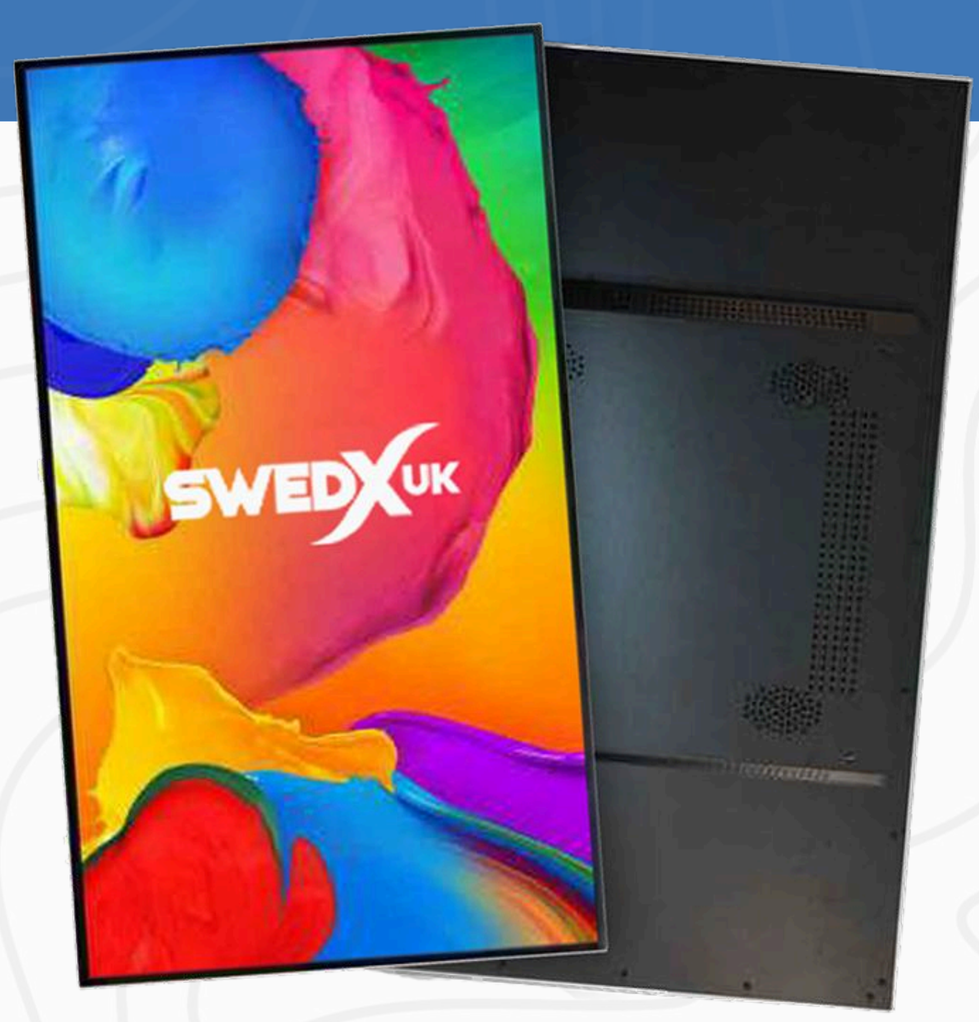

FUNCTIONAL PARAMETER		
	Standalone Version	Android Version
System		Android7.1/8.1/11.0
RAM		2G (Expandable to 4G)
Memory	8G	8G (Expandable to 32G)
WiFi	No	Yes
Video Format	PG, MPG-1, MPG-2, MPG-4, AVI, Mp4, Pm3, TS, MKV, WMV	PG, MPG-1, MPG-2, MPG-4, AVI, Mp4, Pm3, TS, MKV, WMV
Audio Format	Mp3, 24bit linear PCM7.1	Mp3, 24bit linear PCM7.1
Picture Format	GIF, JPEG, PNG, BMP	GIF, JPEG, PNG, BMP
Interface	USB, TF Card	RJ45, USB, HDMI

SCREEN PARAMETER			
Panel Brand	LG/AUO/BOE	Screen Type	IPS (LCD Backlight)
Display Ratio	16:9	Max Resolution	1920*1080P
Brightness	250-400CD/M^2	Contrast Ratio	1000:1
Visual Angle	89/89/89/89(L/R/U/D)	Color	16.7M
Stabdard Size	15.6/18.5/21.5/24/27/32 Inch or customized		

SCREEN PARAMETER			
Operating Temperature	0°C~50°C	Storage Temperature	-10°C~60°C
Working Humidity	5%~90%	Storage Humidity	5%~100%
Input Voltage	DC 12V-5A		

Estimated Delivery Time - **25 Days**

Model Numbers -

- **SWX-K110**