

# NDU-A Series - LED Display Outdoor



www.swedx.co.uk



IP66 Certified



Great for Humid Environment



5000 Nits High Brightness



Rear Serviceable



5kg Per Panel




Anti Glare



Magnetic Safety Lock




High Refresh rate

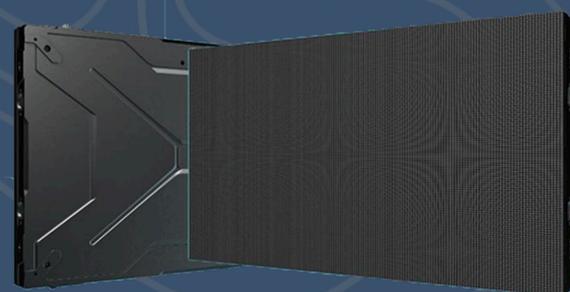

## Features & Details

The NDU-A Series features a compact, 16:9 aluminum panel with high brightness, waterproof LED modules, and magnetic locking. It ensures excellent visibility and fast maintenance with a slim, lightweight design. Ideal for outdoor signage, billboards, and stadiums, the NDU-A Series installs flush to walls with no rear access needed. Perfect for bright, humid, or space-restricted environments.

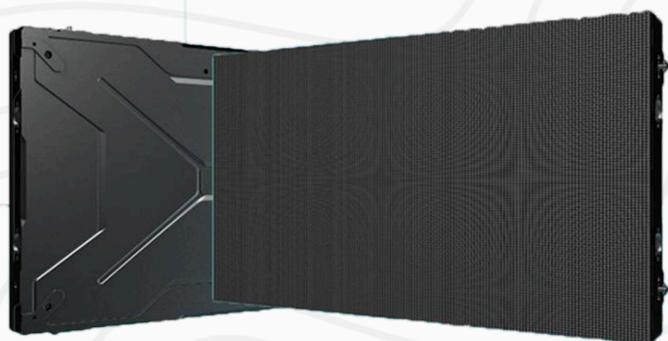

Title	NDU-A2	NDU-A3
Pixel Pitch	2.5 mm	3.125mm
LED Configuration	SMD1415 LED	SMD1415 LED
Panel Dimension:	600mm x337.5mm x 82 mm	600mm x337.5mm x 82 mm
Panel Resolution	240 x 135 (H x V)	192 x 108 (H x V)
Weight Per Panel	5 kg   11.05 lb	5 kg   11.05 lb
Power Max/Average	700W/350W	700W/350W
BTU Max/Average	2390/1100	2390/1100
Serviceability	Rear	Rear
Brightness	4500nits	5000nits
Gray Scale	16 bit	16 bit
Refresh Rate	3840 Hz	3840 Hz
Scan Ratio	1/27	1/18
Viewing Angle	140°/ 140° (H/V)	140°/ 140° (H/V)
IP Rating	IP65	IP65
Operating Environment	Out door	Out door

Estimated Delivery Time - 25 Days

### Model Numbers -

- SWX-DZ190-A2
- SWX-DZ190-A3